

TI 4

Cubicles made of  
FUNDERMAX Compact Laminates and  
FUNDERMAX Compactforming Elements

**FUNDERMAX**®



Published so far  
in our Technical  
Information Series  
are:

- TI 1: Tender Recommendations.
- TI 3: Working with FUNDERMAX Compact Laminates and FUNDERMAX Compactforming Elements.
- TI 4: Cubicles made of FUNDERMAX Compact Laminates and FUNDERMAX Compactforming Elements.
- TI 5: Furnishing Objects and wallprotection with FUNDERMAX Compact Laminates and FUNDERMAX Compactforming Elements.
- TI 6: Properties and Cleaning of FUNDERMAX High-Pressure Laminates (HPL) and FUNDERMAX Compact Laminates (HPL).
- TI 7: FUNDERMAX Exterior, for Balconies and Railings.
- TI 9: FUNDERMAX Metal Laminates.
- TI 10: Working with FUNDERMAX High-Pressure Laminates (HPL).
- TI 11: Stair Railings and Filler Panels made of FUNDERMAX Compact Laminates and FUNDERMAX Compactforming Elements.
- TI 12: FUNDERMAX Exterior, Façade and Wall Cladding.
- TI 16: Tender Specifications for Cubicles and Shower Units made of FUNDERMAX Compact Laminates.
- TI 18: FUNDERMAX Alumax, FUNDERMAX Aluphenol, FUNDERMAX Alucompact.

Please file this Technical Information brochure in your FUNDERMAX information Folder.

The graphics used in our Technical Informations are schematic representations.

# Contents

<b>Cubicle construction</b>	
- General information on FUNDERMAX Compact Panel applications	4
<b>Construction suggestions</b>	5
<b>Construction elements</b>	7
- 1. Floor connections	7
- 2. Wall connections	10
- 3. External corners	13
- 4. Door lintel form and jamb profile	14
- 5. Door fittings	18
- 6. Piecing panels together	24
- 7. Pillar cubicles	25
- 8. Bench	27
- 9. Special fittings	28
- 10. Fittings - Parts list	29
- 11. Ordering information	29

## Cubicle construction

### **General information on FUNDERMAX Compact Laminates applications.**

■ During construction and installation, care must always be taken that the material is not exposed to standing water. The panel material must always be able to dry out again. For shower systems which are in continuous operation, care must be taken that there is adequate ventilation of the room.

■ Due to the characteristics of the material, when fastening FUNDERMAX Compact Laminates to one another - doubles and butt or mitre corner connections - care must be taken, without fail, that all the parts which are to be connected have the same production direction. This means that lengthways must only be connected to lengthways and crossways with crossways. For panel remnants, therefore, the production direction must always be marked. Corner connections must always be supported mechanically by screw plugs, springs, special millings etc.

■ When it is very wet, e.g. for shower cubicles or similar employment, there must always be a mechanical corner fastening together with a gluing system which sets elastic and waterproof.

The same principle applies for FUNDERMAX Compactforming Elements and FUNDERMAX fold forming material. Due to the reformable construction of the panels, particular care is necessary when selecting the use and type of working. Please speak to our Application Engineering department.

System-independent damp-room booths and shower walls, therapy cubicles and changing rooms can be constructed out of FUNDERMAX Compact Laminates with the construction elements described below.

Architects and users can thus meet the local and functional requirements optimally. FUNDERMAX Compact Laminates and FUNDERMAX Compactforming Elements are used for constructing the cubicles. The fittings and constructional parts mentioned are sold by:


Hannelore Lohr  
Elisabethstrasse 36  
A-2380 Perchtoldsdorf  
Tel. +43 1 869 86 52,  
Fax +43 1 867 48 29

Information on the subjects of FUNDERMAX Compact Laminates and the environment, material description, test certificates and warranty can be found in our Technical Information 3 "Working with FUNDERMAX Compact Laminates and FUNDERMAX Compactforming Elements". Our Application Engineering department will answer your questions on working and constructing with FUNDERMAX Compact Laminates. We retain the right to make changes which serve technical progress.

### **Warranty**


ISOMAX guarantees the quality of FUNDERMAX Compact Laminates and FUNDERMAX Compactforming Elements within the framework of the values and test standards given in Technical Information 6. However, it is expressly not liable for defects in the working, construction and installation as it has no influence over these. Local regulations are to be observed without fail. All details correspond to the current state of the technology. Suitability for particular applications cannot be confirmed in general.

Construction suggestions

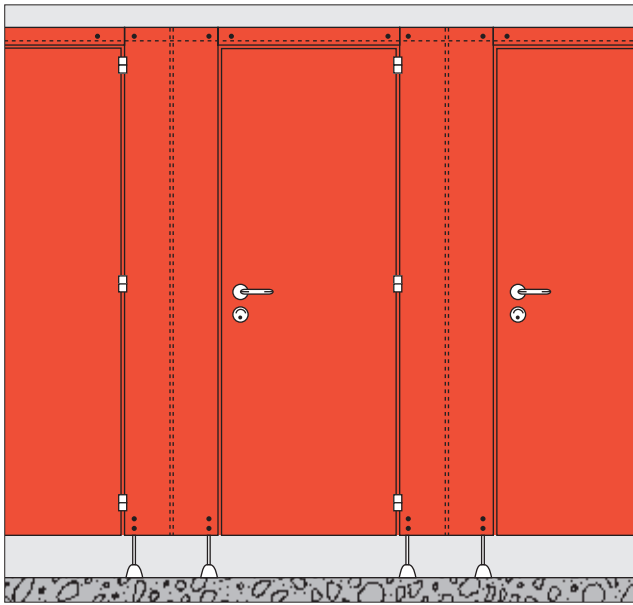

With FUNDERMAX partition supports

Figure 1

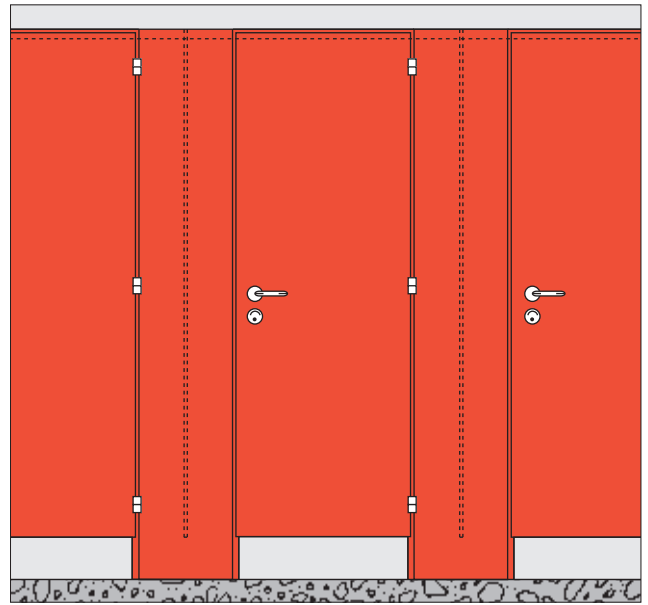

Cubicles with Compact Forming pillars

Figure 3

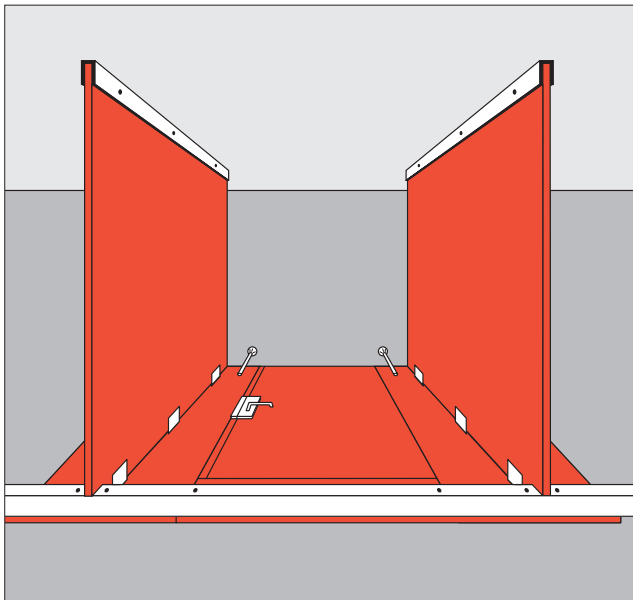


Figure 2


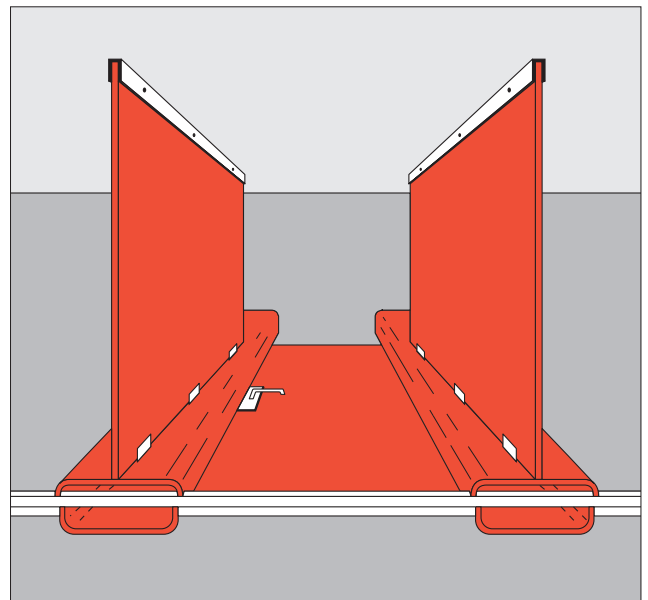



Figure 4

Construction suggestions

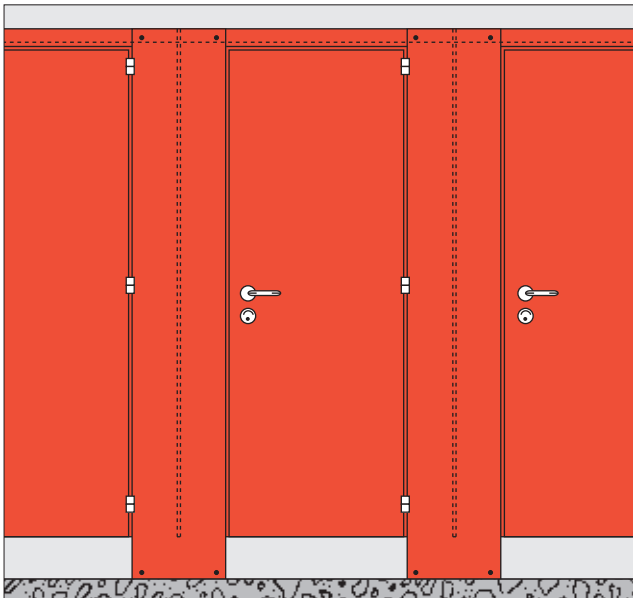

Front screen reaching to floor

Figure 5

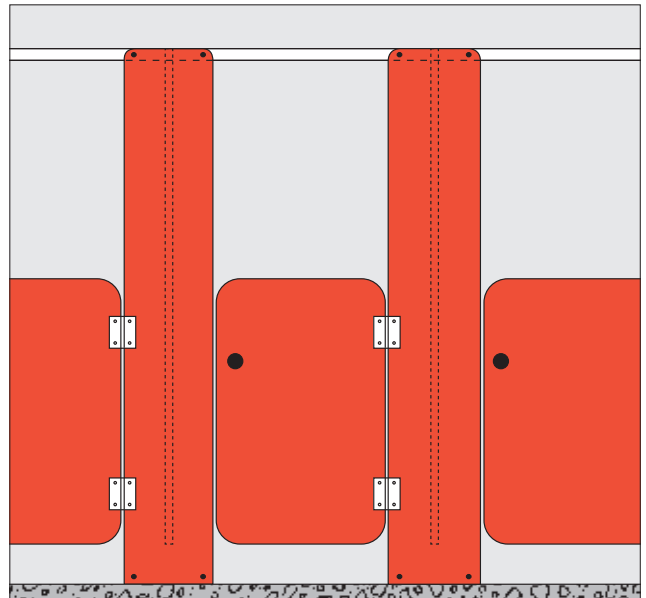

Cubicles with closing doors (spring hinges) for showers or kindergarten WCs

Figure 7

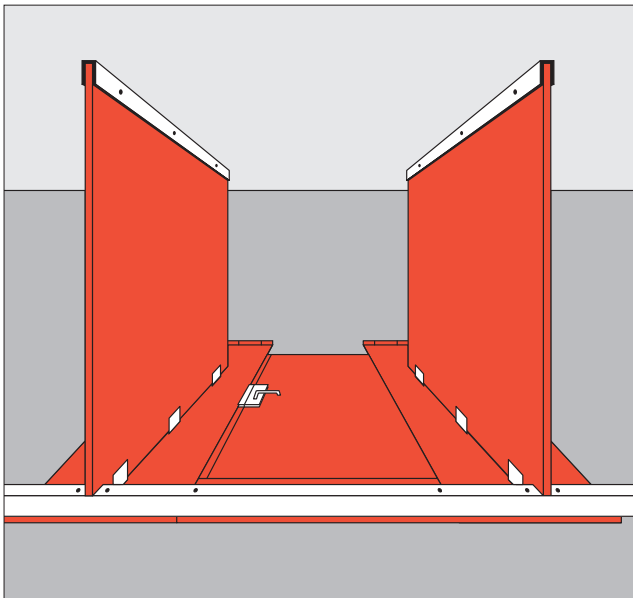


Figure 6


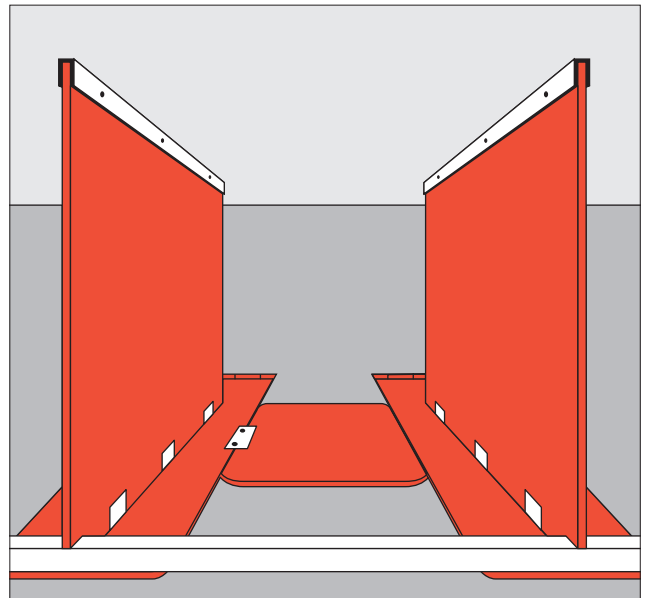



Figure 8

Construction suggestions

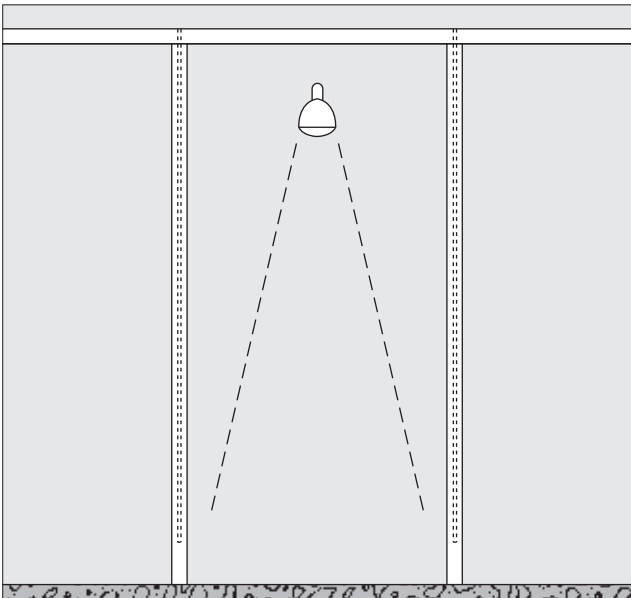

Shower partition with uprights and lintel profile made from structural tubing

Figure 9

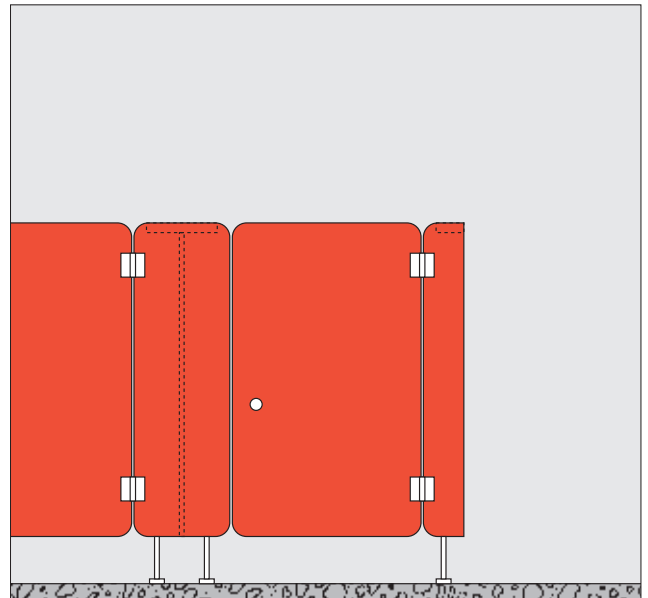

Cubicles for kindergarten WCs

Figure 11

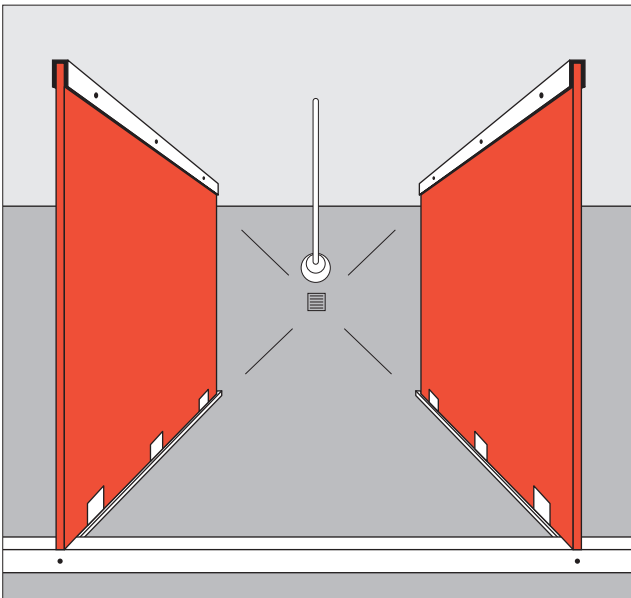


Figure 10

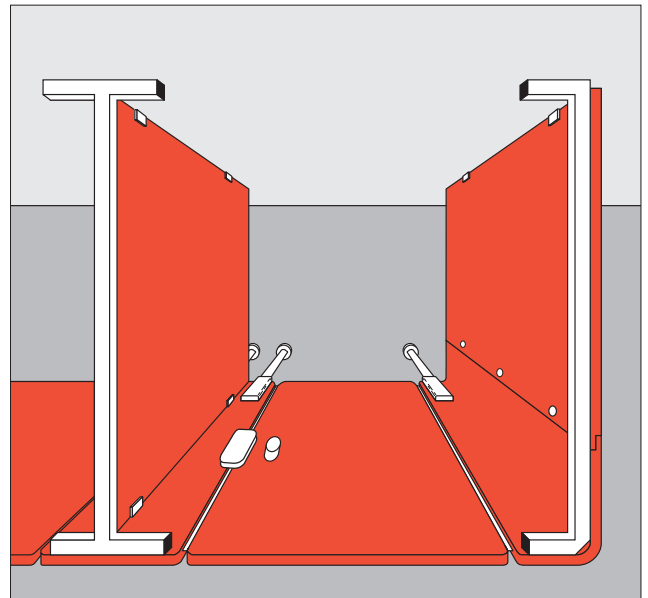


Figure 12


# Construction elements

## 1. Floor connection

### 1.1 FUNDERMAX Compact Supports

■ Height 150 mm, adjustment range 135 - 155 mm, material - stainless steel 16 mm Ø  
1 Floor cap made from stainless steel  
2 Lenticular countersunk sleeves + screws drill diameter in the 13 mm Compact Laminates.  
Order number: 13104

■ Height 100 mm, adjustment range 90 - 110 mm, otherwise as above.  
Order number: 13114

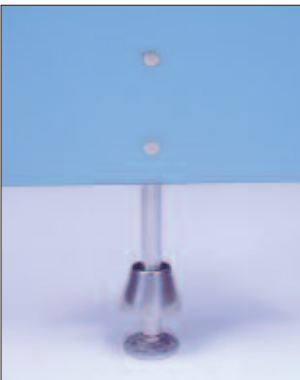

Supports with height adjustment  
Figure 13a



Supports with height adjustment  
Figure 13b


### 1.2 FUNDERMAX Compact partition support with concealed internal height adjustment

■ Height: 150 mm, adjustment range 135 - 155 mm, material - stainless steel  
1 floor cap made from stainless steel, mounting plate with height adjustment and cap made from cast black aluminium.  
Supports with lower height (e.g. for cloakroom cubicles) are not required; the mounting plate is mounted correspondingly higher. Order number: 12302



Internal height adjustment Support - outside view

Figure 14

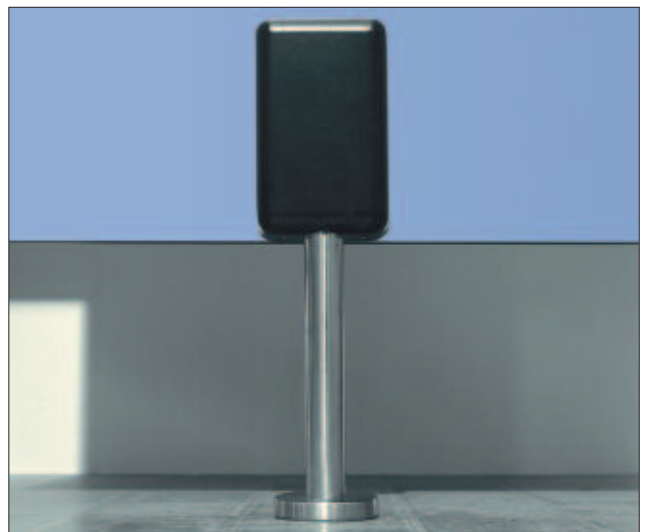

Inside view


Figure 15



# Construction elements

## 1.3 Aluminium profile

- L-profile 30/15/3 mm, material natural aluminium, anodised, order number: 31903
- Screws for screwing through: Lenticular countersunk sleeves M 6 x 12
- + cap head screw M 6 x 10
- + anti-theft cap, stainless steel. Drill diameter 8 mm.
- Order number: 93101

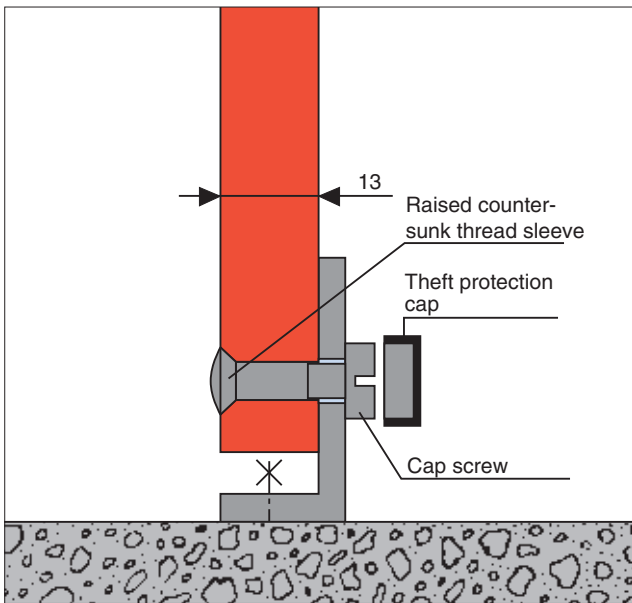


Vertical section

Figure 16

## 1.4 Floor connection for front upright (for shower wall or concealment wall) and cubicles with wide front screen

- Floor plate about 100 x 100 mm, pin height about 100 mm, suitable for a 30/30/3 mm square structural tubing. Material - raw aluminium. Fix to floor before tiling. Structural tubing screwed offset from the middle with countersunk head self-tapping screws. Screws are included in delivery. Order number: 00902

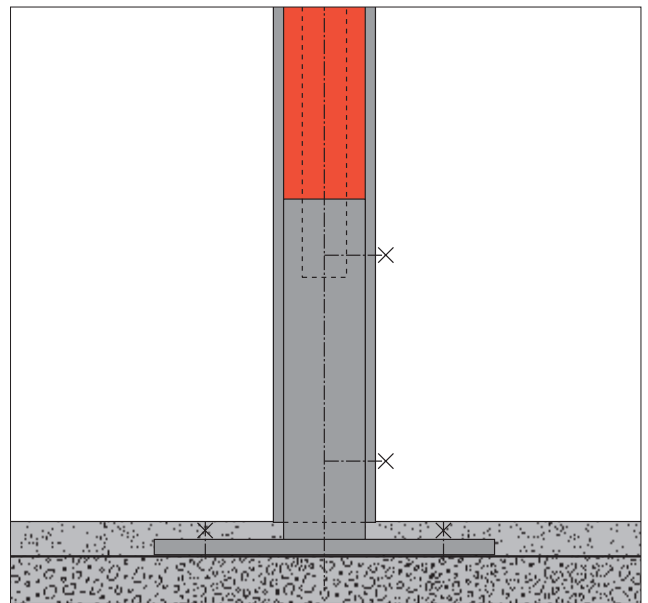

Frontal section

Figure 18

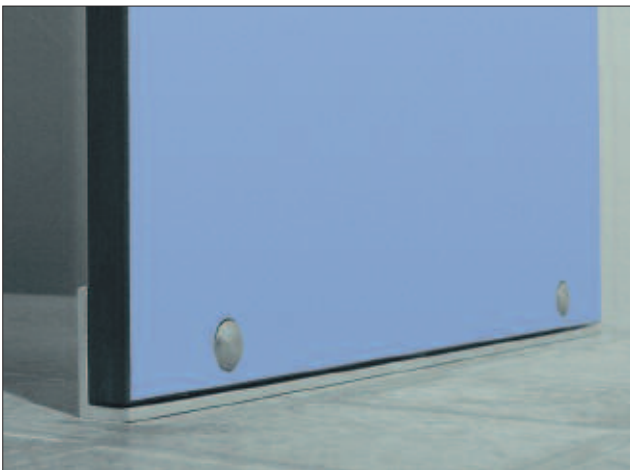



Figure 17

# Construction elements

## 1.5 Floor connection for pillar cubicles

■ Floor angle made from galvanised steel 200/290/70/3 mm with 4 stainless steel self-tapping screws.

Order number: 04001

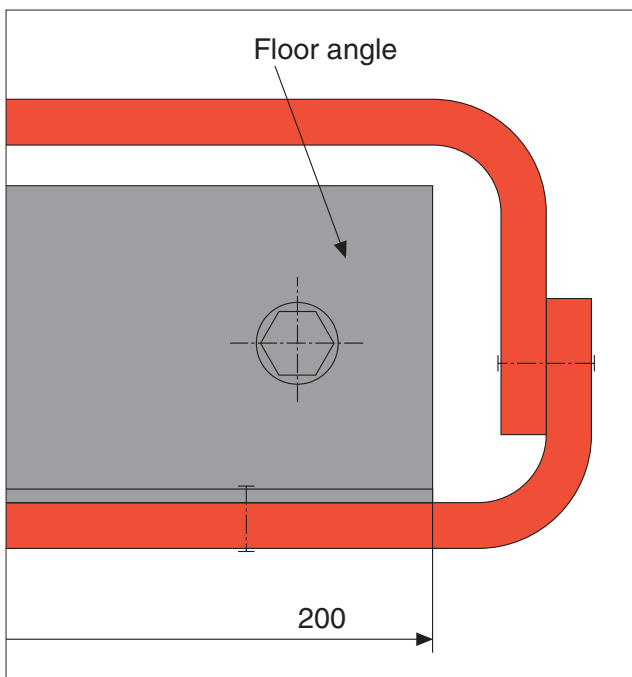

Horizontal section

Figure 19

## 2. Wall connection


### 2.1 FUNDERMAX Compact wall connection element

■ Material - stainless steel, 2 black caps, 1 lenticular countersunk sleeve and screw, drill diameter in the Compact Laminates 8mm. For each wall connection element, 2 pieces per compensation washer are included in delivery; for 13 mm panel thickness.

Order number: 22301



Figure 20

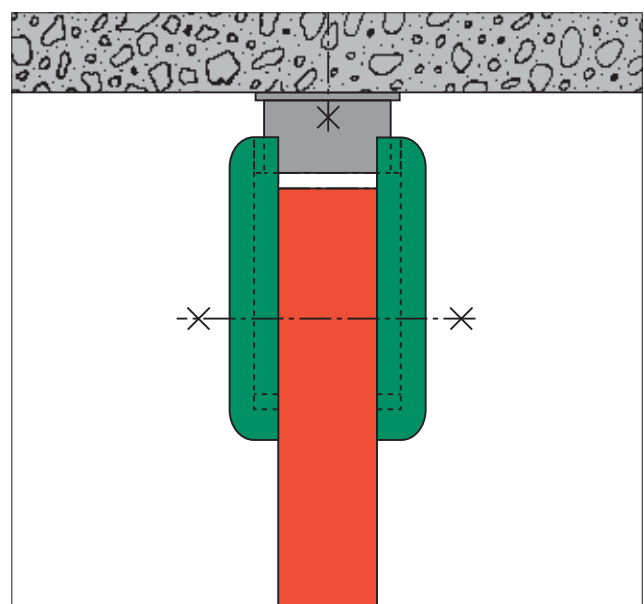

Horizontal section

Figure 21

## Construction elements

### 2.2 FUNDERMAX Compact partition connection angle for connection of the front elements to the adjacent walls

- 1 angle about 45/35/35


Material - black polyamide

1 lenticular countersunk sleeve + M 6 x 10 screw + Anti-theft cap, drill diameter in the Compact Laminates 8 mm, without wall fixing screws! For 13 mm panel thickness.

Order number: 22306

Larger side clearance 12 mm, so that lateral adjustment is usually not required.

**Nevertheless, it is not possible to see in.**

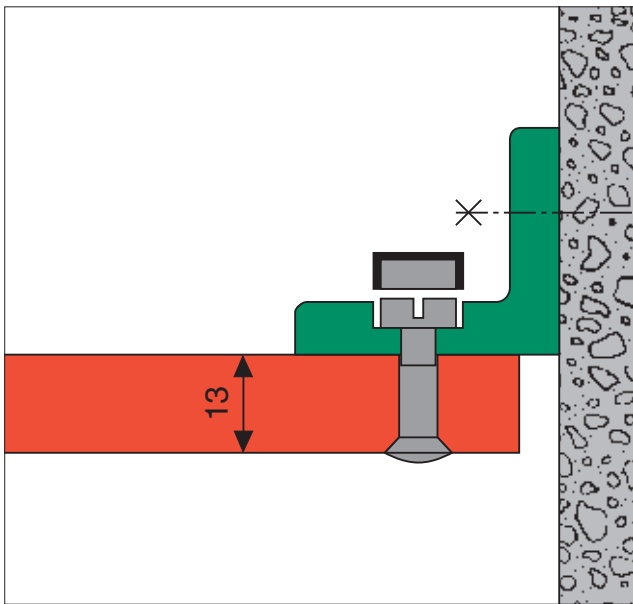

Horizontal section

Figure 22

### 2.3 Aluminium profile for connection of the partitions to the wall

- U-profile 23/17/23/2 mm


13 mm inside measurement.

Material - natural aluminium, anodised

Order number: 31303

Screws for screwing through lenticular countersunk sleeve M 6 x 12 + M 6 x 10 cap-head screw + anti-theft cap, drill diameter 8 mm.

Order number: 93101

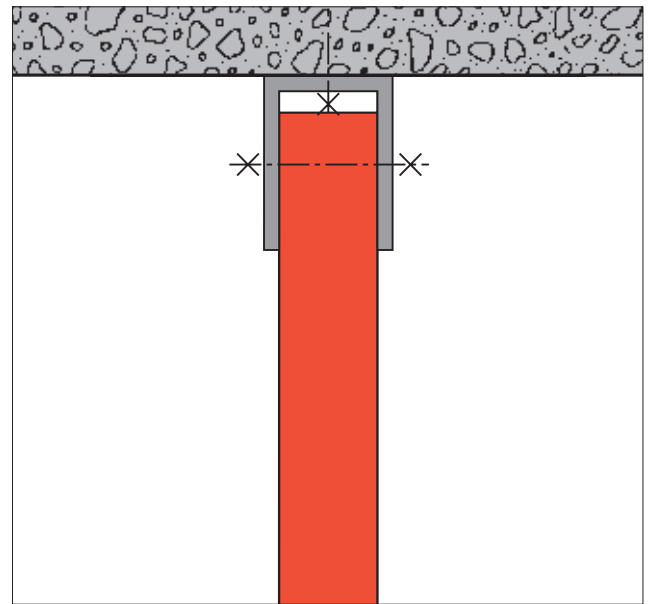

Horizontal section

Figure 24

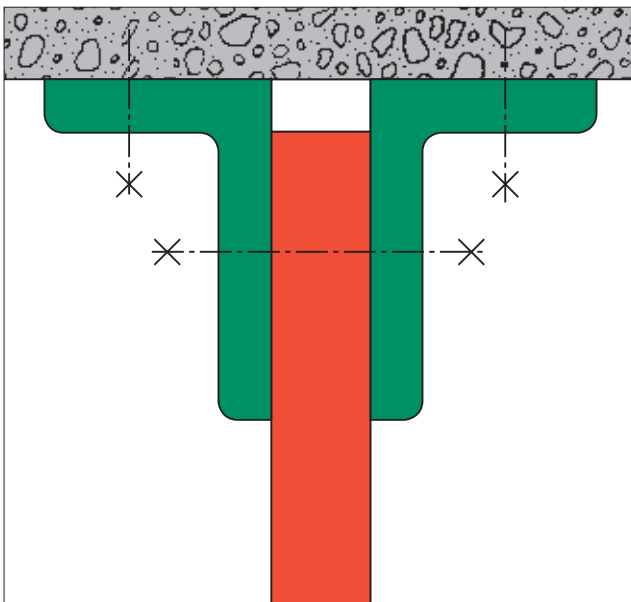


Figure 23

# Construction elements

## 2.4 FUNDERMAX Compact partition connection angle

- 2 angles, black, about 45/35/35 mm
- Material - black polyamide, 1 cylinder sleeve + screw + 2 anti-theft caps
- Drill diameter 8 mm, without wall fixing screws for 13 mm panel thickness
- Order number: 22305



Horizontal section

Figure 25


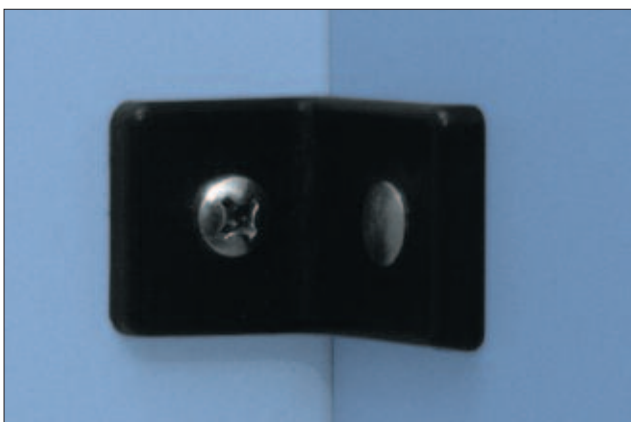


Figure 26

## 2.5 Trax coupling for connecting the partitions to the front screen

- Material - aluminium, stainless steel setscrew with lenticular countersunk sleeve.
- Drill diameter 8mm.
- 2 black cover panels for 13 mm panel thickness.
- Order number: 22303

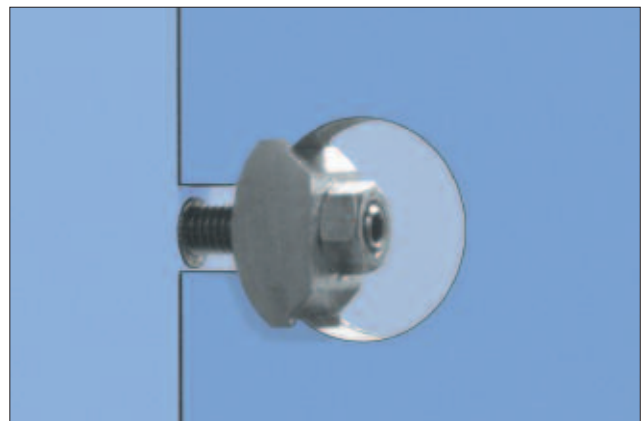

Trax coupling open


Figure 27



Figure 28

## Construction elements

■ The setscrew must be well oiled before screwing it in if the PA4-7.5 screw plug is taken and not the lenticular countersunk sleeve. Screw-in depth into the screw plugs at least 6 mm!

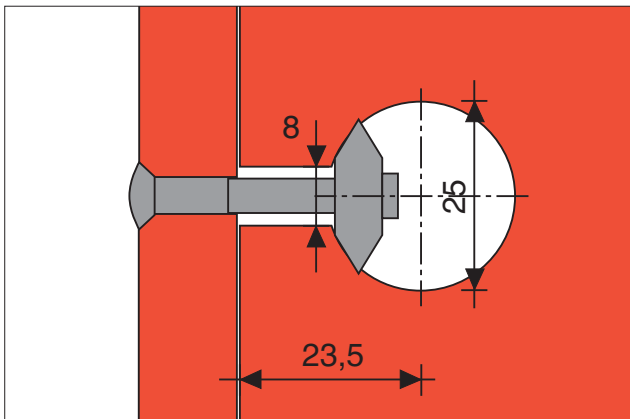

Side view - coupling drill hole

Figure 29

### 2.5.1 Connection of the 13 mm Compact Laminate to the upright

■ Trax coupling with M 6 sleeve + M 6 x 60 screw for front structural tubing. Principle as in Figure 29.  
Order number: 22304



Figure 30

# Construction elements


## 3. External corners

### 3.1 Compactforming corner pillars

■ L-profile 30/30/3 mm, natural aluminium, anodised  
Order number: 31907

■ The over-panelling must be at least 30 mm, gluing with PUR glue. M 6 x 12 lenticular countersunk sleeve + M 6 x 10 cap-head screw + anti-theft cap  
Drill diameter 8 mm.  
Order number: 93101

■ Lateral fixing of the pillars with structural tubing 30/30/3 mm  
Order number: 31901  
and 2 30/30/3 mm aluminium angles each, 30 mm long as well as 4 stainless steel self-tapping screws.  
Order number: 21901

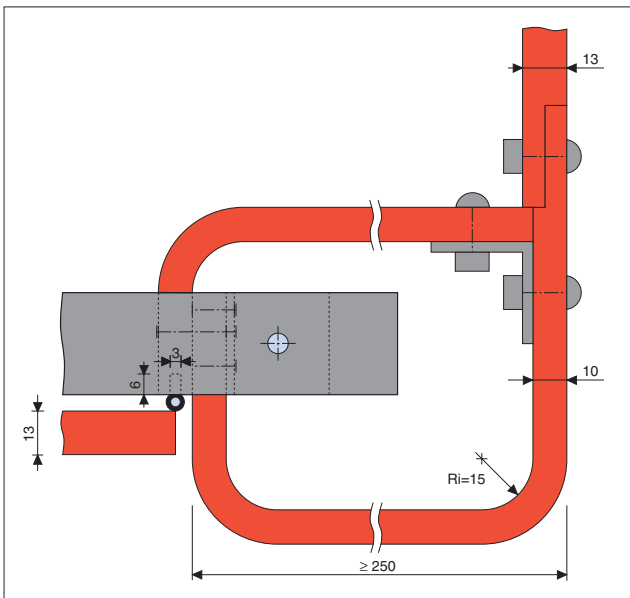


Cross-section - pillar cubicle

Figure 31

### 3.2 Compactforming corner over-plating as in 3.1.

■ Compactforming Elements are supplied via our specialist dealers, decoration from our current delivery programme, deliver time! For Compact-forming do not screw into the edges, for fastening of partition and corner element both double-Trax couplings and over-platings can be used.  
See also Page 26 in 6.1 and 6.2

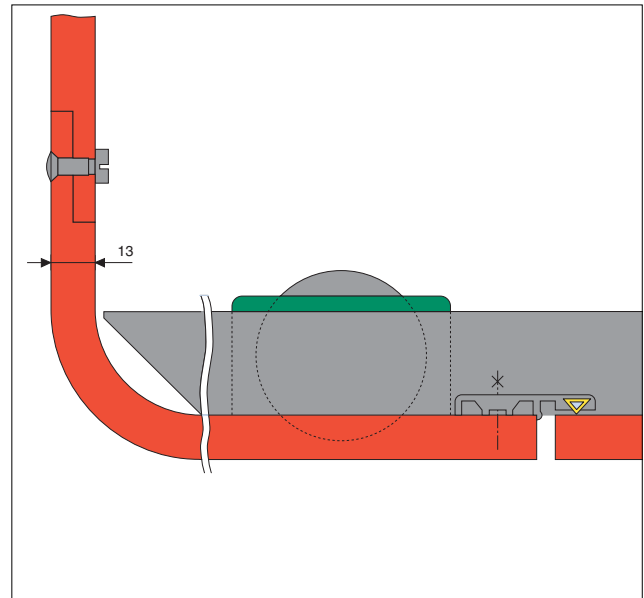

Cross-section - round corner

Figure 32

#### 4. Forming door lintel and support profiles

##### 4.1 Lintel profile


■ Structural tubing 30/30/3 mm, natural aluminium, anodised

Order number: 31901

Screws for screwing through, M 6 x 12 lenticular countersunk sleeve + M 6 x 35 cap-head screw + washer + anti-theft cap.  
Drill diameter 8 mm

Order number: 93102

■ Lintel field when door opens inwards at least 80 mm high in order to be able to hang the doors, dimension A.

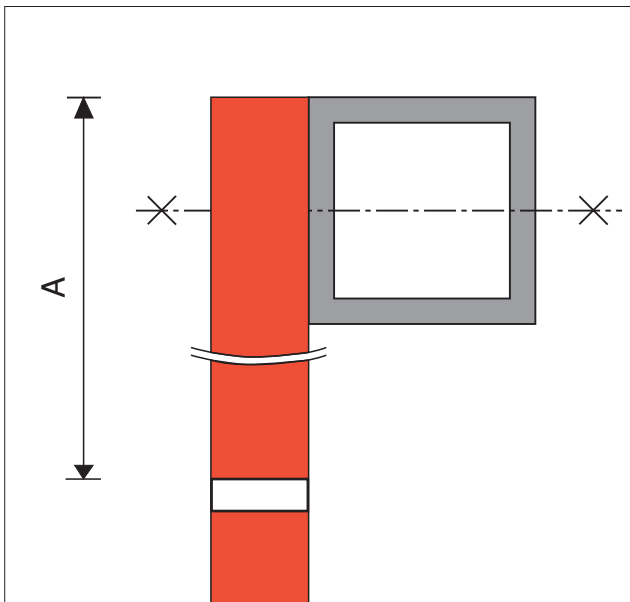

Vertical section - lintel profile over the door

Figure 33



Figure 34

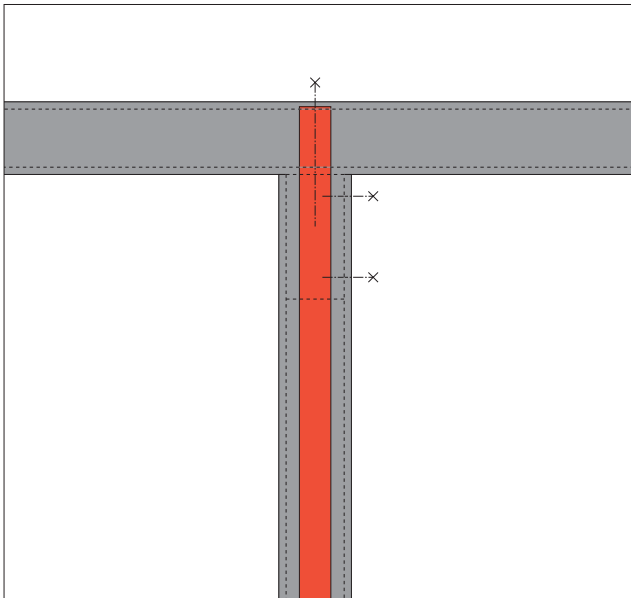


Figure 35

## Construction elements

### 4.2 Connection of the lintel profile to the uprights for shower or concealment walls.

- Horizontal profile, connected with a pin screwed into the vertical profile, suitable for 30/30/3 mm structural tubing. Material - raw aluminium with threaded blind hole. 1 M 6 x 50 mm countersunk screw, structural tubing with 2 countersunk self-tapping screws 4.8 x 22 mm screwed are included in delivery. Screw offset from the centre. Order number: 00903




Frontal section - Lintel profile plug

Figure 36

### 4.2.2 Structural tubing for stiffening

- For cubicles with laterally arranged WC pans there is a specially wide front element. In order to stiffen this sufficiently, it is necessary to support it in the area of the door opening with a 30/30/3 mm vertical aluminium profile. This is fixed to the floor with a floor connection element (order no.: 00902) and with the element to the lintel profile (order no.: 00903).
- For systems where the front screens have no support from a partition, the lintel profile has to be reinforced, preferably by 40/30/2.5 mm aluminium structural tubing. Order number: 31902  
Screws for screwing through, M6 x 12 mm lenticular countersunk sleeve + M6 x 45 mm cap-head screw + washer + anti-theft cap, stainless steel. Drill diameter 8 mm. Order number: 93100

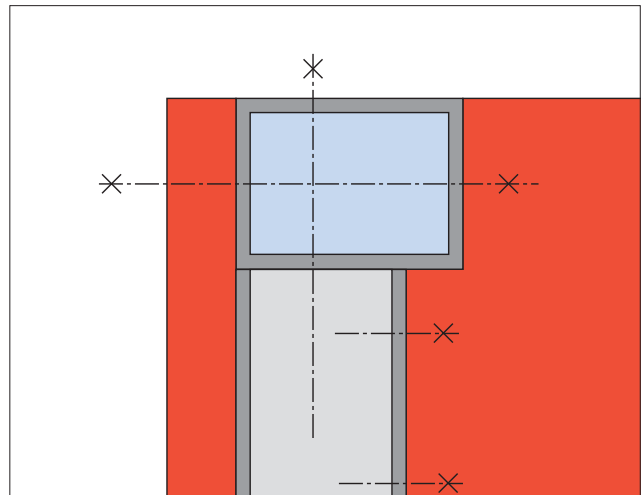

Vertical section - Lintel profile, pillar cubicle

Figure 37



## Construction elements

### 4.3 Piecing together the door lintel profile

■ When piecing together, the two structural tubes are screwed with a pin. Length about 200 mm, suitable for 30/30/3 mm structural tubing.  
Material - blank aluminium 4 countersunk self-tapping screws for screwing are included in delivery.  
Order number: 00904

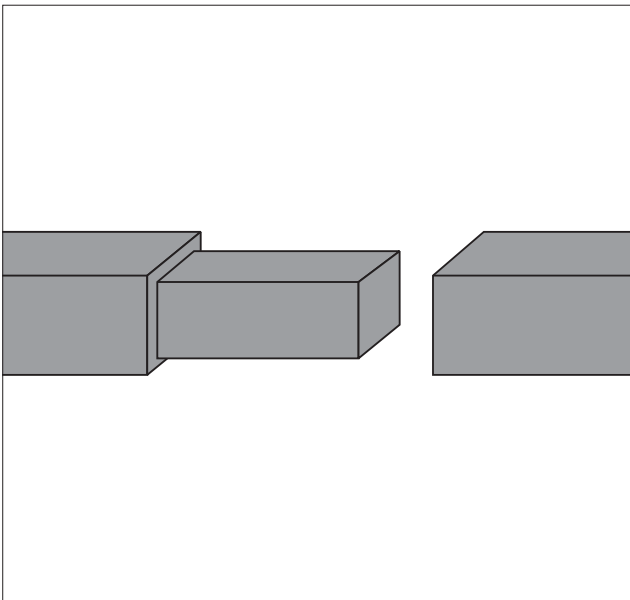


Figure 38

### 4.4 Wall connection of the door lintel profile

■ Length of the stub about 100 mm, suitable for 30/30/3 mm structural tubing, material natural aluminium, anodised  
2 countersunk self-tapping screws for fixing the profile are included in delivery.  
Order number: 01101

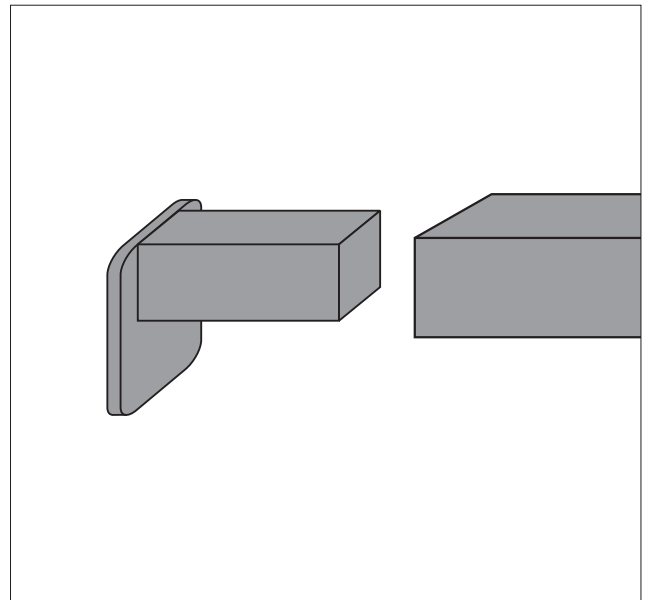


Figure 39

# Construction elements

## 4.5 Door lintel of the pillar cubicles

■ Structural tubing 30/30/3 mm made of natural aluminium, anodised  
Order number: 31901


Angle for pillar fixing complete with stainless steel countersunk self-tapping screws

Order number: 21901

Structural tubing is inserted into cut out pillars, see 3.1 on Page 14.


## 4.6 Stabilisation for kindergarten WC partitions.

■ Steel structural tubing, 30/30/3 mm, welded in I-shape or in C-shape. Ends closed with caps. These parts are to be made as required.

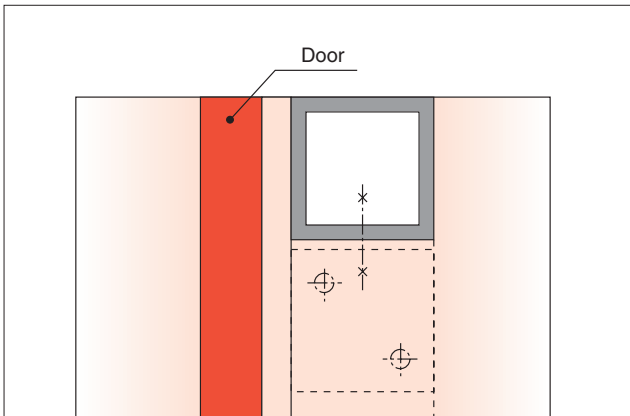

Vertical section - Lintel profile, pillar cubicle

Figure 40

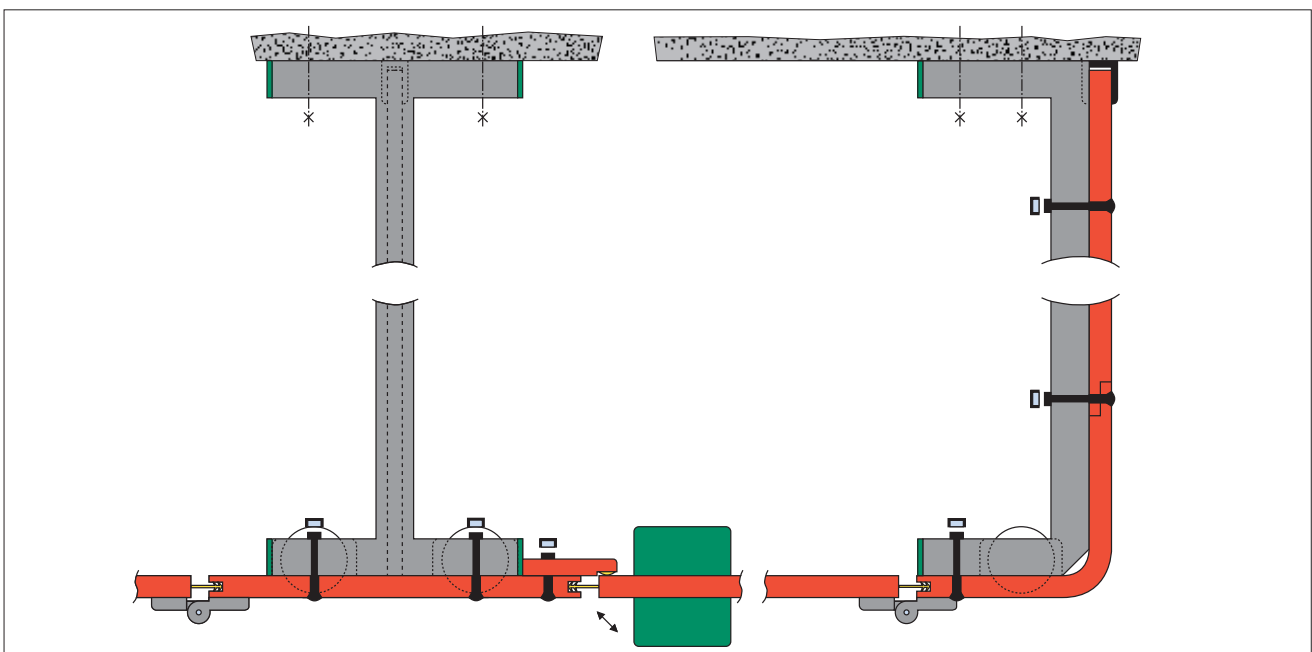

Horizontal section - kindergarten cubicles

Figure 41

# Construction elements

## 5. Door fittings

### 5.1 FUNDERMAX Compact jamb strip


■ Material - natural aluminium anodised, drilled, 40 mm wide with black jamb rubber. Suitable screws 3.9 x 16 mm, stainless steel, are included in delivery.

Drill diameter in the Compact Laminate: 3.5 mm

The ends of the jamb strips are milled out the same as the opposing lock socket, Figure 43.

Delivery length: 2000 mm

Order number: 41101

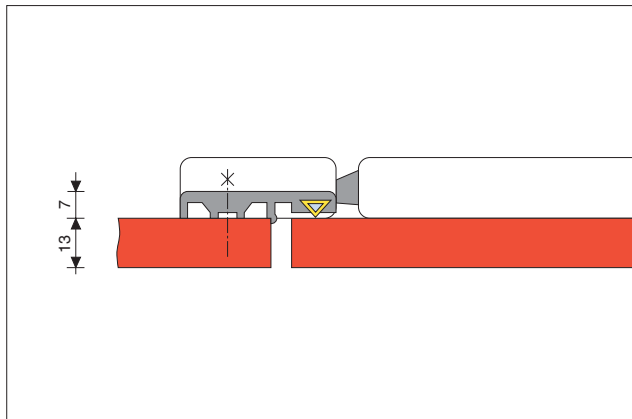

Horizontal section - Jamb strip

Figure 42

### 5.2 FUNDERMAX Compact screw-on lock combination

■ Lock and opposing lock socket galvanised and powder coated, including fixing screws and washers. Colour RAL 9011 black, other colours are possible as special production according to colour collection.


Note delivery time!

For WC bolt

Order number: 52103

For profile cylinder

Order number: 52104

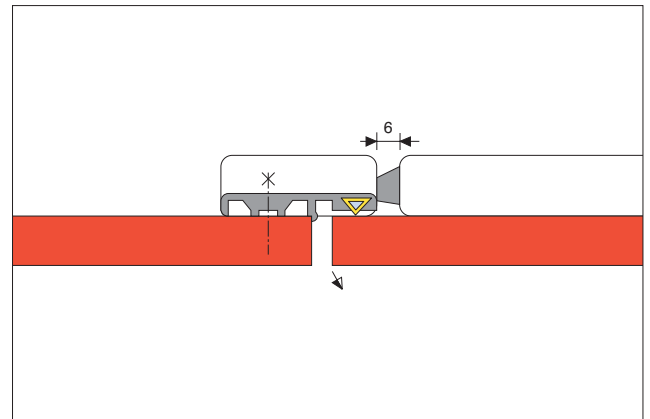

Door opening outwards Jamb mounted on the screen  
Horizontal section


Figure 44



Figure 43

## Construction elements

- The door handle has to be ordered separately. When ordering the handle, the thickness of the lock socket (about 16 mm) and the thickness of the Compact Laminate used is to be given.

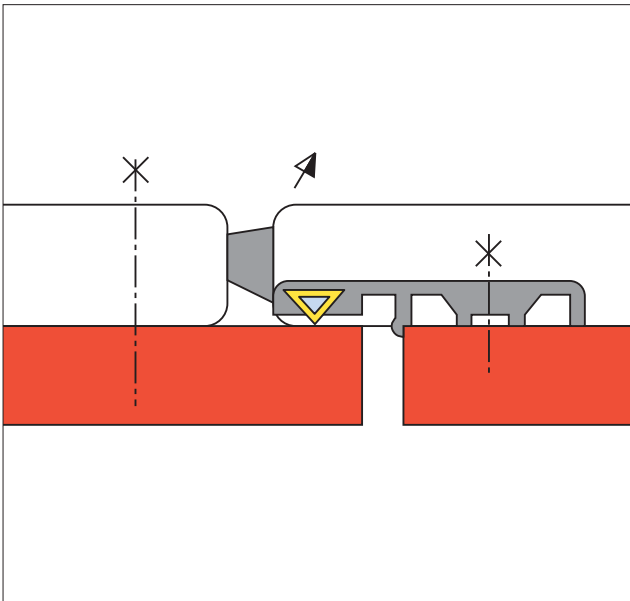

Door opening inwards Jamb strip mounted on the door  
Horizontal section

Figure 45



Figure 46

### 5.3 FUNDERMAX Compact Band

- FUNDERMAX Compact Band, 80 x 58 mm with brass pin and polyamide washers.

Material - natural aluminium, anodised and stainless steel screws 4.2 x 25 mm and 4.2 x 13 mm.


For 13 mm panel thickness, left

Order number: 61303

For 13 mm panel thickness, right

Order number: 61304

- Caution. Predrill the screw holes so that the door edge does not split. For Compacforming Elements, do not screw into the edge.

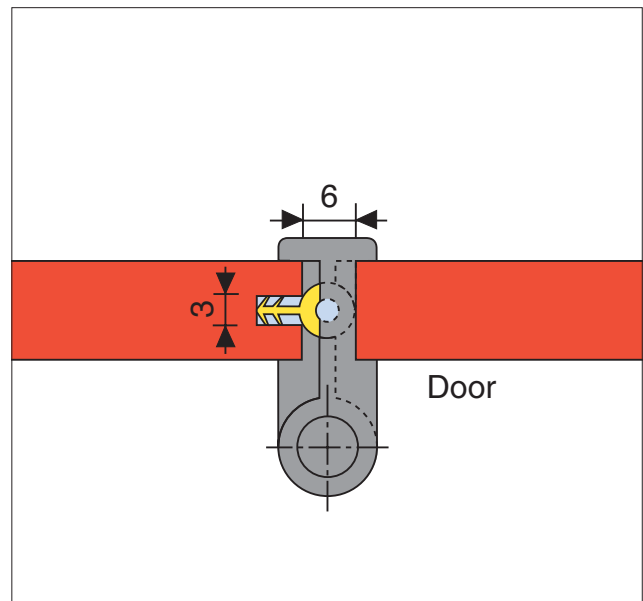

Horizontal section - Hinge

Figure 47

Construction  
elements

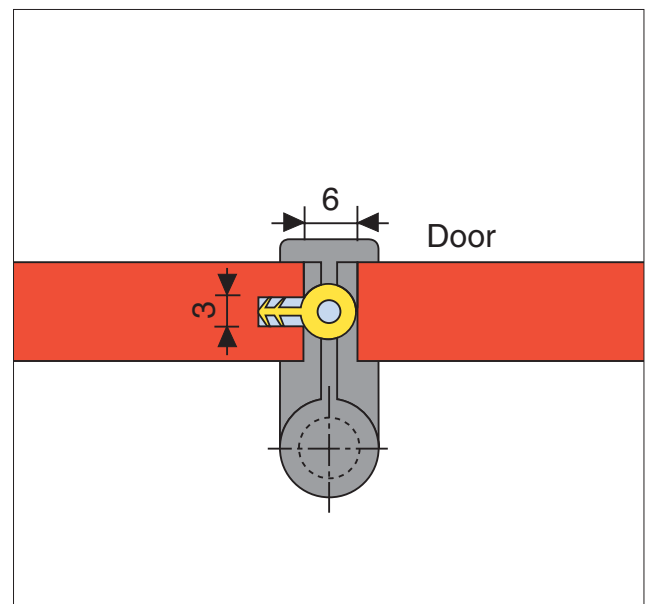


Figure 48

5.4 Hinge-side door view seal


■ Special rubber profile, delivery length - endless, groove 6 x 3 mm.

Order number: 72103



Horizontal section - View seal

Figure 50

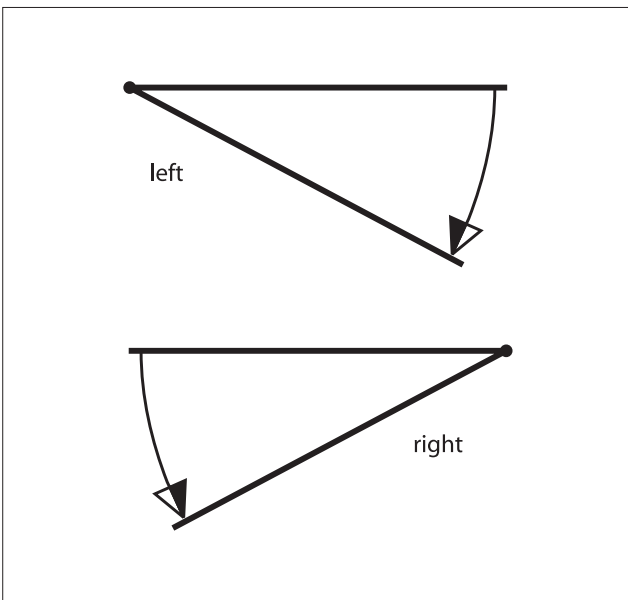

Hinge stop

Figure 49

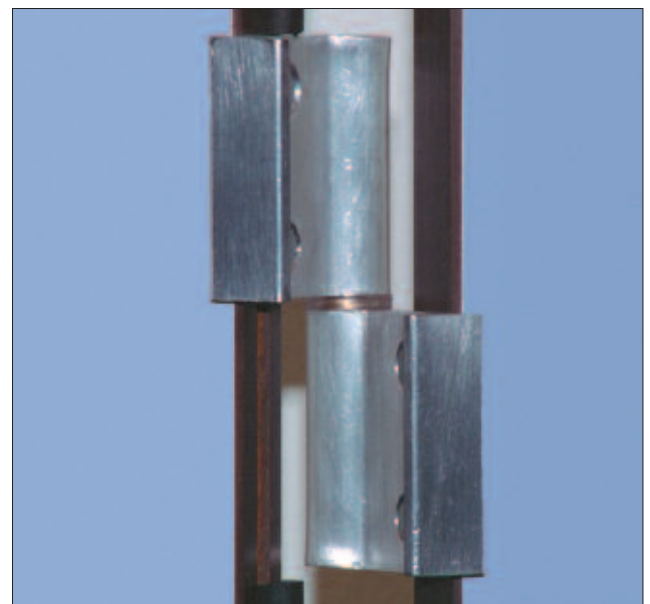


Figure 51

# Construction elements

## 5.5 FUNDERMAX Compact spring hinge for kindergarten cubicles with door seal for large door joint clearance.

- - Compact spring hinge - opening  
Order number: 62101
- Compact spring hinge - closing  
Order number: 62102
- Door seal profile for kindergarten cubicles  
Order number: 72102



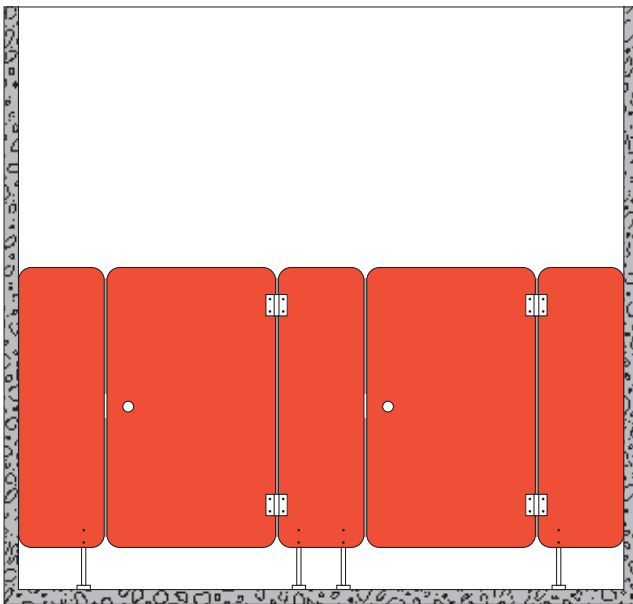


Figure 52

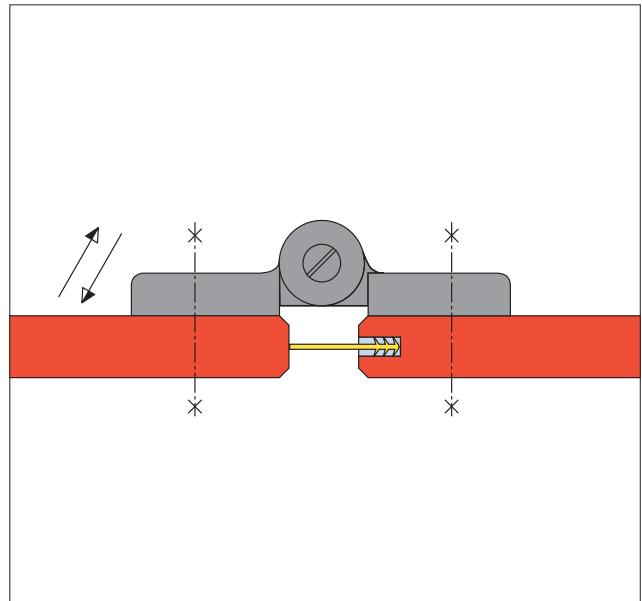

Horizontal section - Hinge side

Figure 53

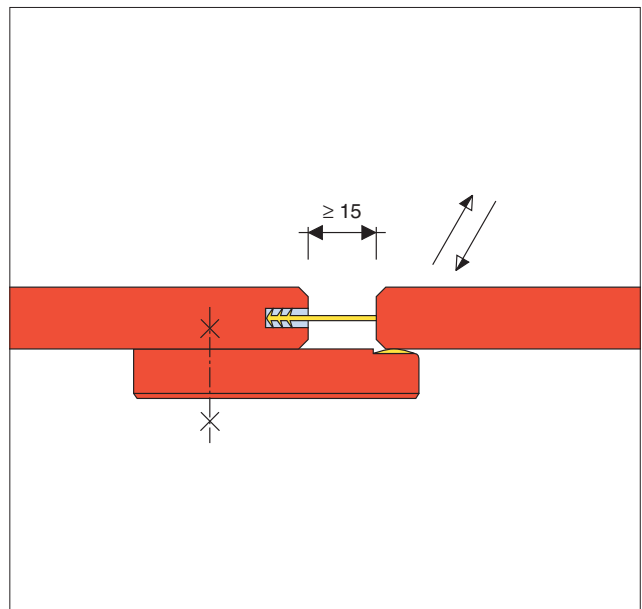

FUNDERMAX Compact Laminate element about 100 x 60 x 10  
as door jamb with jamb buffer.  
Horizontal section

Figure 54

## Construction elements

### 5.6 FUNDERMAX Compact spring hinge

■ About 80 x 100 mm for opening or closing door (changing cubicles, showers). Material - black aluminium, powder coated including 4 lenticular countersunk sleeves + screws + anti-theft caps, stainless steel.

Compact spring hinge, opening

Order number: 62101

Compact spring hinge, closing.

Order number: 62102

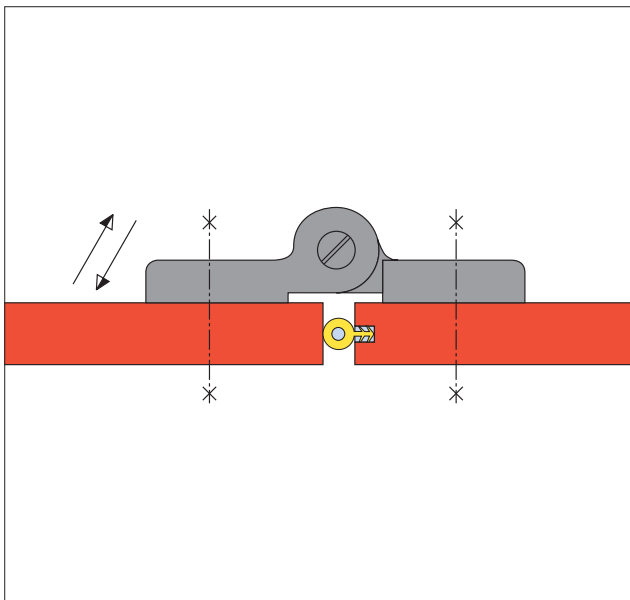


Figure 55



Figure 56

## Construction elements

### 5.7 FUNDERMAX Compact rising hinge for self-closing cubicle doors

■ About 80 x 40 mm with brass pin  
Material - fibreglass reinforced polyamide, black. Suitable screws are included in delivery, stainless steel countersunk self-tapping screws 4.2 x 25 mm.

For 13 mm panel thickness, left


Order number: 63301

For 13 mm panel thickness, right

Order number: 63302

Bearing plate for Compact -forming pillar

Order number: 00301

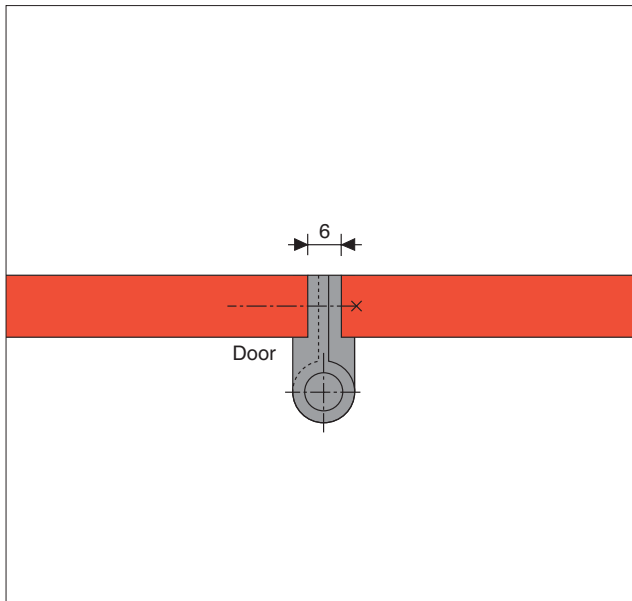


Horizontal section - Hinge

Figure 57



Rising hinge

Figure 58

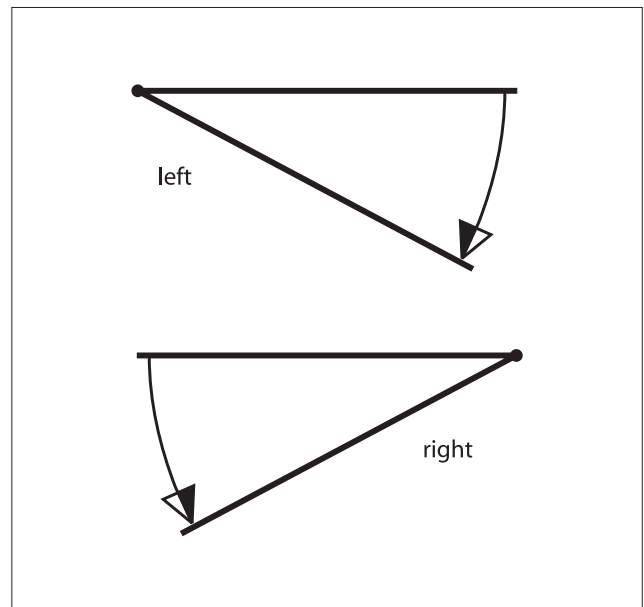

Hinge stop

Figure 59



# Construction elements

## 5.8 GM frame profile

### ■ Topglas

Glas Marte GmbH & Co KG  
Brachsenweg 39  
A-6900 Bregenz  
Tel.: +43 5574 67 22-0  
Fax.: +43 5574 67 22-55  
E-mail: [glas@glasmarte.at](mailto:glas@glasmarte.at)


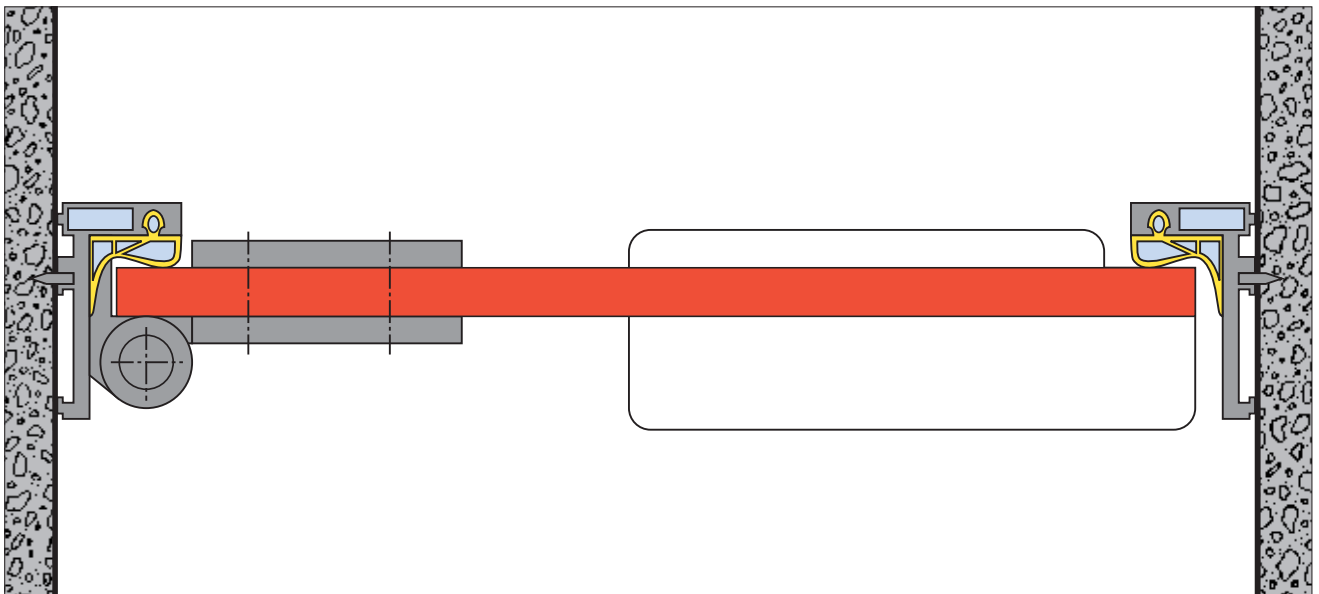


Figure 60

## 6. Piecing panels together


### 6.1 Double Trax coupling

■ For connecting FUNDERMAX Compact Laminates e.g. for partitions. For 13 mm panel thickness  
Order number: 22307

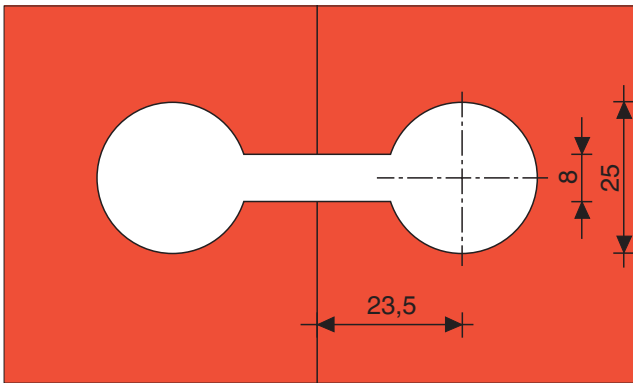

View of milling out for coupling

Figure 61

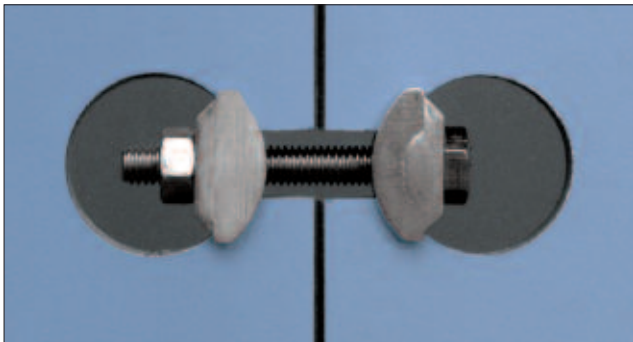

Straining screw

Figure 62




Cover

Figure 63

### 6.2 Over-panelling

■ The over-panelling must be at least 30 mm wide, glued with PUR glue and 3 to 4 screws in addition.  
M 6 x 12 lenticular countersunk sleeve + M 6 x 10 cap-head screw + anti-theft cap, stainless steel.  
Drill diameter 8 mm.  
Order number: 93101

■ For walls wider than 1300 mm, a stiffening profile (Figure 32) and a support must be provided.

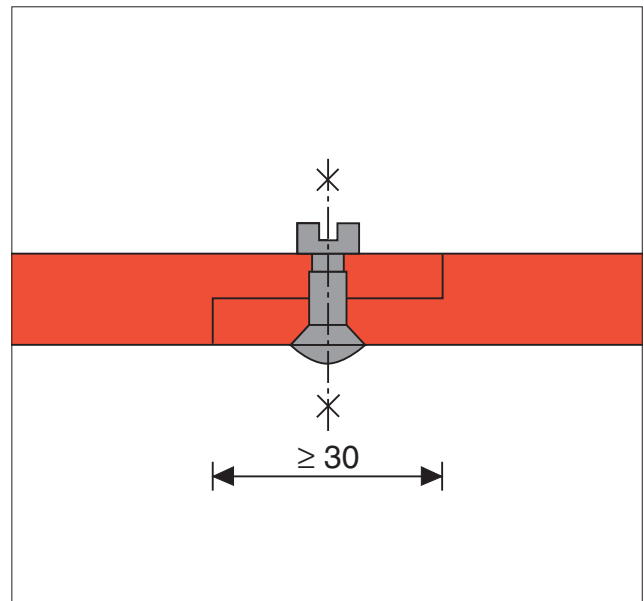

Horizontal section - Over-panelling

Figure 64

## Construction elements

### 7. Pillar cubicles

■ The front pillars are assembled from two Compact-forming U-elements with 4.8 x 25 mm pop-rivets. At one floor angle, which is fixed with 2 heavy-duty screw plugs, the pillar is screwed in with 4 Parker screws.

Floor angle, 4 galvanised Parker screws, see Page 10, Item 1.5.

Order number: 04001

FUNDERMAX Compact band, 80 x 58 mm with brass pin and polyamide washers.

Material - natural aluminium anodised, stainless steel screws 4.2 x 25 mm,

For 13 mm panel thickness, left

Order number: 61303

For 13 mm panel thickness, right

Order number: 61304

The door edge has to latch 3 mm in the hinge zone.

■ When screwing across the edge, pay close attention to the drill diameter! Please make a template. The Compact screw-on lock, see 5.2, is used without an opposing socket for Compact-forming pillars.

Standard colour - RAL 9011 black, other colours are possible as special production according to the colour collection. Note the delivery time.



Cubicle system with FUNDERMAX Compactforming pillars

Figure 65



Hinge inside

Figure 66



Hinge outside

Figure 67



Lock socket with striking plate

Figure 68

## Construction elements

■ FUNDERMAX Compact screw-on lock with striking plate, suitable for Compactforming pillars.

For WC bolt.

Order number: 52101

For profile cylinder.

Order number: 52102

■ The door handle has to be ordered separately.


When ordering the handle, the thickness of the lock socket

(about 16 mm) and the thickness of the Compact Panel used is to be given. A special rubber profile is used as the door jamb, see 5.4.

Delivery length - endless.


Order number: 72103

■ Lateral fixing of the pillars with 30/30/3 mm structural tubing as well as aluminium angle and screws as under Item 4.5 on Page 18.

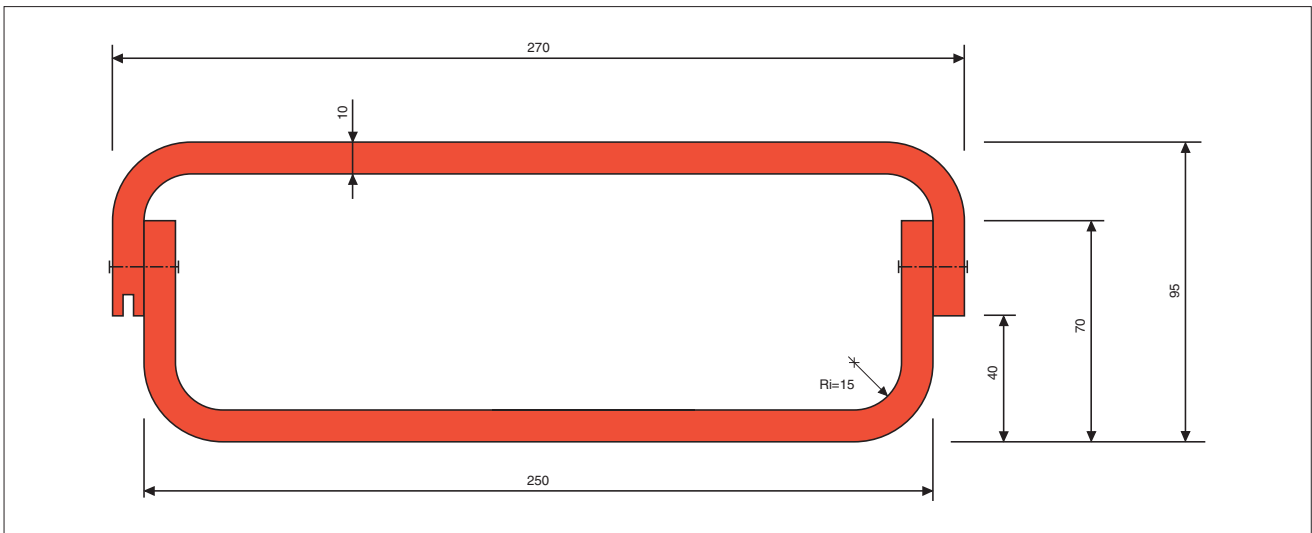

Horizontal section - Central pillar made from FUNDERMAX Compactforming Elements

Figure 69

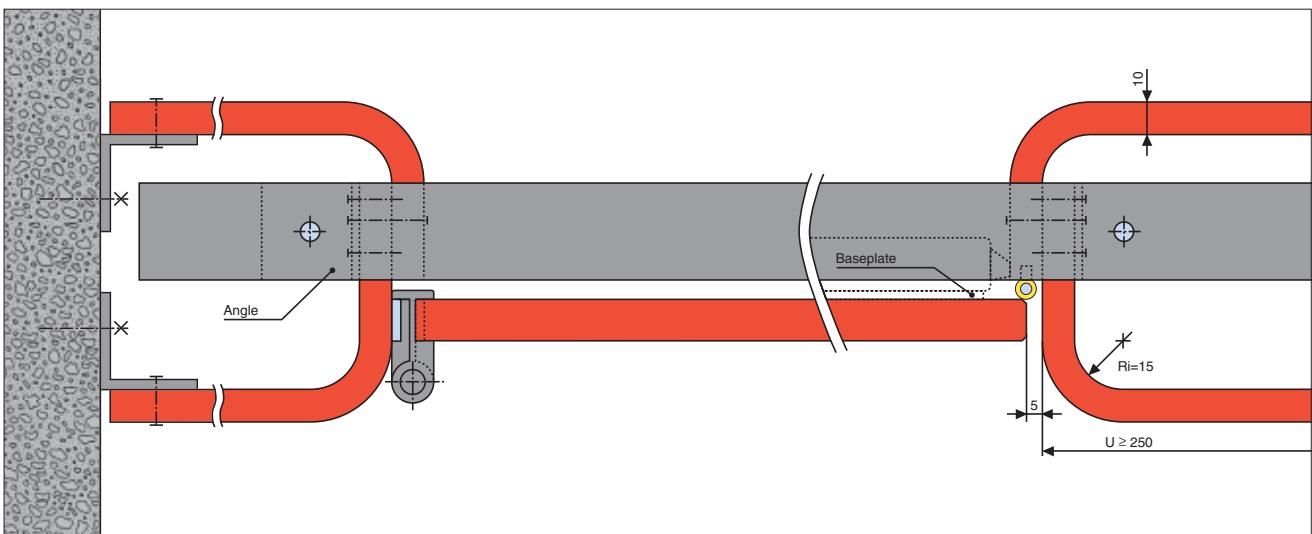


Horizontal section - Wall half-pillar and door with central pillar

Figure 70

# Construction elements

## 8. Bench

■ Bench made from an L-shaped FUNDERMAX Compactforming Element, thickness 10 mm. Mounting is done on to 30/30/3 mm aluminium structural tubing  
Order number: 31901

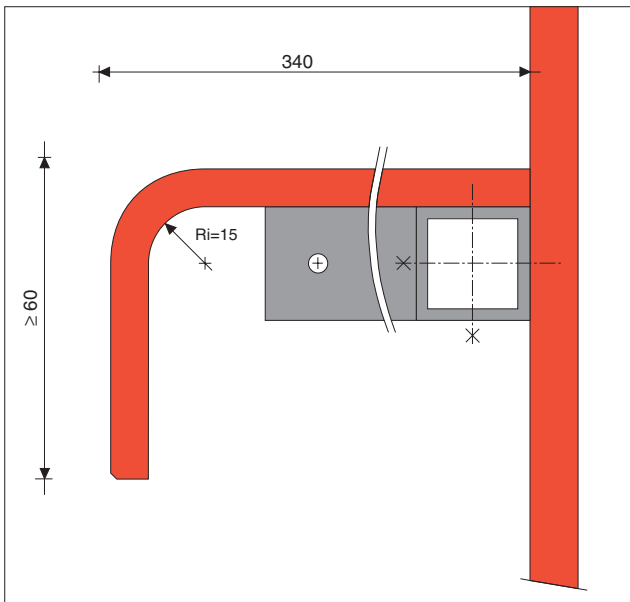

Vertical section - Bench made from FUNDERMAX Compactforming Figure 71



Bench

Figure 72

Construction  
elements

9. Special fittings




Lock with outside stop and red/white indicator,  
used with the lever from order no. 83006.  
Order no. 83007

Figure 73



Handle kit, 2 pieces  
Order no. 86011

Figure 75

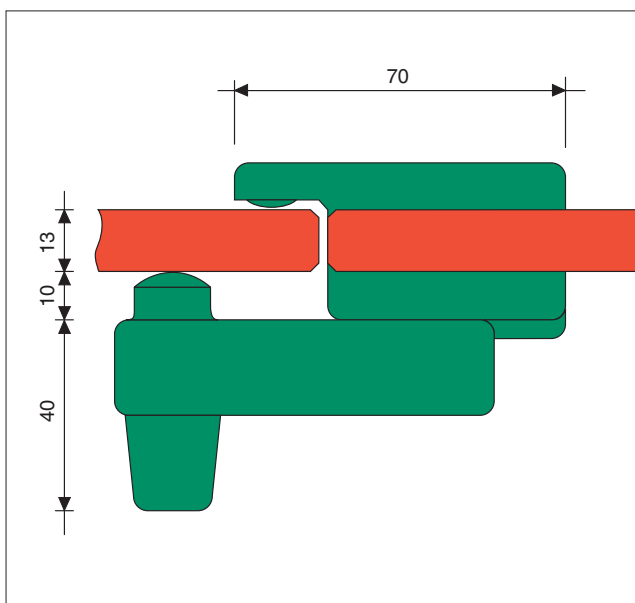

for Figure 73

Figure 74



Lock with red/white indicator for rebated doors  
Order no. 83006


Figure 76

Construction  
elements




Inside locking lever  
Order no. 83006

Figure 77

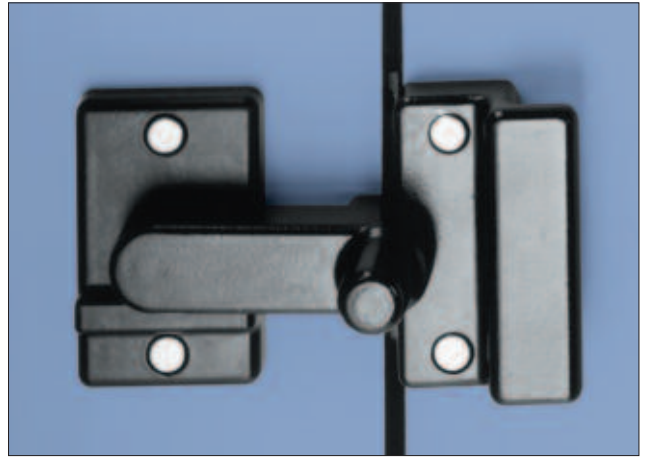

Locking lever with handle and stop inside  
Order no. 83008

Figure 79

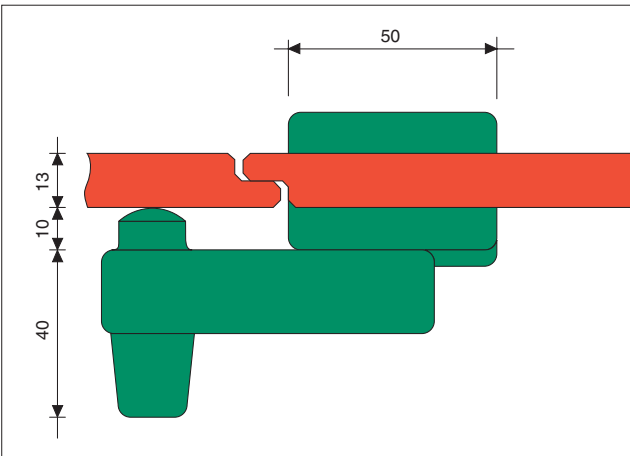


Order no. 83006

Figure 78



Lock with handle and red/white indicator outside  
Order no. 83008

Figure 80

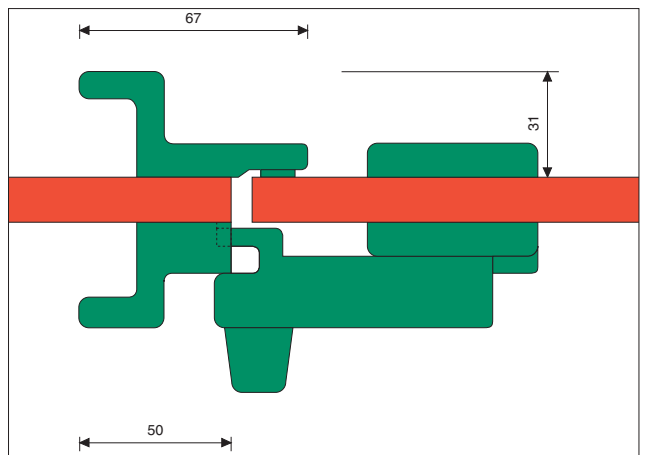

Order no. 83008

Figure 81

Construction  
elements

## 10. Ordering information

When constructing cubicles out of FUNDERMAX Compact Laminates, you have the opportunity to choose from the entire colour programme of our FUNDERMAX panel collection. Please note our current delivery programme. The construction elements in this Technical Information are suitable for all areas where FUNDERMAX Compact Laminates are used. If other profiles, screws etc. are used then, when used in damp and wet rooms, they must always be of non-rust quality (stainless steel, brass, aluminium). Care is to be taken that the expansion clearance of the FUNDERMAX Compact Laminates is sufficient!

In addition, the following also supply construction elements for cubicle construction:

NORMBAU GmbH  
D-77871 Renchen  
Tel.: +49 (0)7843/7040

PBA s.r.l.  
I-36056 Tezze Sul Brenta  
Via Enrico Fermi 1  
Tel.: +39 424/54 51  
Fax: +39 424/54 52 22  
E-mail: info@pba.it  
www.pba.it

## 11. Fittings - Parts list

Colours and profile lengths on request from Lohr company.  
When ordering, please copy this page and insert the number of items.

Hannelore Lohr  
Elisabethstr. 36,  
A-2380 Perchtoldsdorf  
Tel.: +43 1/869 86 52  
Fax.: +43 1/867 48 29



## Construction elements

Designation	Compact Laminates Thickness - 13 mm	
	Pieces	Order no.
Partition support with concealed height adjustment, 150 mm		12302
Partition support with concealed height adjustment, 100 mm		12312
FUNDERMAX Compact partition support, height 150 mm, stainless, Ø 16 mm		13104
FUNDERMAX Compact partition support, height 100 mm, stainless, Ø 16 mm		13114
FUNDERMAX Compact wall connector part with 2 compensation washers		22301
Trax coupling with M6 sleeve + screw M6 x 30		22303
Trax coupling with M6 sleeve + screw M6 x 45		22304
Double Trax coupling		22307
2 FUNDERMAX Compact partition connector angles + screw		22305
1 FUNDERMAX Compact partition connector angles + screw		22306
Aluminium U-profile 23/17/23/2 from 1000-6000 mm in complete metres	lin. metres	31303
Aluminium L-profile 30/15/3 from 1000-6000 mm in complete metres	lin. metres	31903
Aluminium L-profile 40/40/3 from 1000-6000 mm in complete metres	lin. metres	31905
Aluminium L-profile 30/30/3 from 1000-6000 mm in complete metres	lin. metres	31907
Aluminium structural tubing 30/30/3 from 1000-6000 mm in complete metres	lin. metres	31901
Aluminium structural tubing 40/30/2.5 from 1000-6000 mm in complete metres	lin. metres	31902
FUNDERMAX Compact jamb strip + rubber + screws, L=2000 mm		41101
Hinge-side rubber profile with ridge, endless length	lin. metres	72103
Door seal profile for kindergarten cubicles, endless length	lin. metres	72102
FUNDERMAX Compact hinge 80/58, anodized, left		61303
FUNDERMAX Compact hinge 80/58, anodized, right		61304
Aluminium shims for vertical hinge for pillar cubicles		00301
FUNDERMAX Compact spring hinge, 80/100, including screws, opening		62101
FUNDERMAX Compact spring hinge, 80/100, including screws, closing		62102
FUNDERMAX Compact rising hinge, left		63301
FUNDERMAX Compact rising hinge, right		63302
Caratt Lux screw-on hinge for furniture doors made from compact laminates		63303
Floor connection part for 30/30/3 structural tubing		00902
Connection stub with internal thread for 30/30/3 structural tubing		00903
Wall connector part for 30/30/3 structural tubing		01101
Connection pins for piecing together		00904
Connection angle (+ screws) for lintel profile per pillar		21901
Floor angle for pillar		04001
FUNDERMAX Compact screw-on lock for CF pillars for WC bolt		52101
FUNDERMAX Compact screw-on lock for CF pillars for cylinder catch		52102
FUNDERMAX Compact screw-on lock with opposing lock socket for WC bolt		52103
FUNDERMAX Compact screw-on lock with opposing lock socket for cylinder catch		52104
Sleeve M 6 x 12 + screw M 6 x 10 + Disikap (Anti theft cap)		93101
Sleeve M 6 x 12 + screw M 6 x 35 + Disikap (Anti theft cap)		93102
Sleeve M 6 x 12 + screw M 6 x 25 + Disikap (Anti theft cap)		93103
Sleeve M 6 x 12 + screw M 6 x 45 + Disikap (Anti theft cap)		93100
Stainless countersunk sheet metal screws 4,2 x 9,5		93104
Stainless countersunk sheet metal screws 4,2 x 13		93105
Stainless countersunk sheet metal screws 3,9 x 13		93106
Stainless countersunk sheet metal screws 3,9 x 16		93107
Stainless countersunk sheet metal screws 3,9 x 19		93108
Wash basing mounting kit		95000

**FUNDERMAX**®

Funder Industrie Gesellschaft m.b.H.  
Klagenfurter Straße 87-89, A-9300 St.Veit/Glan  
Tel.: +43(0)5/9494-0, Fax: +43(0)5/9494-4200  
E-mail: office@fundermax.at, www.fundermax.at

ISOMAX Dekorative Lamine GmbH  
Industriezentrum N.Ö.-Süd, A-2355 Wiener Neudorf  
Tel.: +43(0)5/9494-0, Fax: +43(0)5/9494-4668  
E-mail: support@maxontop.com, www.fundermax.at

Companies of the *Constantia* INDUSTRIES AG